

Kodak Alaris S5160 ADF scanner 600 x 600 DPI A3 Grey, White



Brand : Kodak Alaris

Product code: 8016685

Product name : S5160

- Ultra-rugged Design
- Built for speed
- Metal Detection
- Versatile

160 ppm/320 ipm, 305 mm x 10.16 m max, 600 DPI, 10/100/1000 LAN, USB 3.2 Gen 1x1, 60 kg
 Kodak Alaris S5160. Maximum scan size: 305 x 10160 mm, Optical scanning resolution: 600 x 600 DPI, Input colour depth: 48 bit. Scanner type: ADF scanner, Product colour: Grey, White, Display: LCD. Sensor type: CCD, Light source: White LED (2x), Scan file formats: BMP, JPEG, PDF, PNG, XLSX, DOCX, RTF, TIFF, PPTX. Auto document feeder (ADF) input capacity: 750 sheets. Maximum ISO A-series paper size: A3


| Scanning | | Network | |
|-------------------------------------------|--------------------------------------------------|-------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Maximum scan size * | 305 x 10160 mm | Ethernet LAN | ✓ |
| Optical scanning resolution * | 600 x 600 DPI | Supported network protocols | DHCP, TCP/IP |
| Colour scanning | ✓ | Power | |
| Input colour depth | 48 bit | Power supply type * | AC |
| Output colour depth | 24 bit | Power consumption (typical) | 240 W |
| Output greyscale depth | 8 bit | Power consumption (standby) | 0.5 W |
| Greyscale levels | 256 | Power consumption (PowerSave) | 23.7 W |
| ADF scan speed (b/w, A3) | 160 ppm | AC input frequency | 50 - 60 Hz |
| Design | | Input voltage | 100 - 240 V |
| Scanner type * | ADF scanner | Weight & dimensions | |
| Product colour * | Grey, White | Width | 693 mm |
| Display | LCD | Depth | 554 mm |
| Display diagonal | 19.1 cm (7.5") | Height | 434 mm |
| Touchscreen | ✓ | Weight | 60 kg |
| Colour display | ✓ | Sustainability | |
| Control type | Buttons, Touch | Sustainability certificates | ENERGY STAR |
| Built-in display * | ✓ | System requirements | |
| Performance | | Minimum RAM | 8192 MB |
| Sensor type * | CCD | Minimum processor | Intel i5 - Gen 12 |
| Light source | White LED (2x) | Windows operating systems supported | Windows 10, Windows 10 Education, Windows 10 Education x64, Windows 10 Enterprise, Windows 10 Enterprise x64, Windows 10 Home, Windows 10 Home x64, Windows 10 IOT Core, Windows 10 IoT Enterprise, Windows 10 Pro, Windows 10 x64, Windows 10 Pro x64, Windows 11, Windows 11 Enterprise, Windows 11 Enterprise x64, Windows 11 Home, Windows 11 Pro, Windows 11 x64 |
| Scan file formats | BMP, JPEG, PDF, PNG, XLSX, DOCX, RTF, TIFF, PPTX | Server operating systems supported | Windows Server 2019, Windows Server 2022 |
| Scan drivers | TWAIN, WIA, Kofax VRS, ISIS | Operational conditions | |
| Barcode reader | ✓ | Operating temperature (T-T) | 15 - 35 °C |
| Scanning noise level | 62 dB | Operating relative humidity (H-H) | 15 - 80% |
| Scanner smart software features | Correction & auto-cropping | Other features | |
| Input capacity | | Control panel | ✓ |
| Auto document feeder (ADF) input capacity | 750 sheets | Scan media weight | 25 - 433 g/m ² |
| Paper handling | | | |
| Maximum ISO A-series paper size * | A3 | | |
| Ports & interfaces | | | |
| USB port * | ✓ | | |
| USB version | 3.2 Gen 1 (3.1 Gen 1) | | |

Other features

| | |
|-------------------------|-------------------------------------------------------------------------------------------------------------------|
| Compliance certificates | RCM, cTUVus, ICES, CE, GS mark, VCCI, Norma Oficial Mexicana (NOM), Federal Communications Commission (FCC), UKCA |
|-------------------------|-------------------------------------------------------------------------------------------------------------------|

Technical details

| | |
|--------------------------------|-----------------------------------------------------------------------------------------|
| Linear (1D) barcodes supported | Codabar, Code 128, Code 3 of 9, EAN-13, EAN-8, Interleaved 2 of 5, PDF417, UPC-A, UPC-E |
|--------------------------------|-----------------------------------------------------------------------------------------|

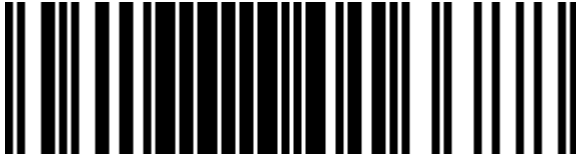

0041778016688



041778016688

Catalog Object Cloud



Disclaimer. The information published here (the "Information") is based on sources that can be considered reliable, typically the manufacturer, but this Information is provided "AS IS" and without guarantee of correctness or completeness. The Information is only indicative and can be changed at any time without notification. No rights can be based on the Information. Suppliers or aggregators of this Information do not accept any liability with regard to the content of (web)pages and other documents, including its Information. The publisher of the Information can not be held liable for the content of 3rd party websites that are linking this Information or are linked to from this Information. You as the User of the Information are solely responsible for the choice and usage of this Information. You are not entitled to transfer, copy or otherwise multiply or distribute the Information. You are obliged to follow the directions of the copyright owner(s) with regard to the use of the Information. Exclusively Dutch law is applicable. With regard to price and stock data on the site, the publisher followed a number of starting points, which are not necessarily relevant for your private or business circumstances. Therefore, the price and stock data are only indicative and are subject to changes. You are personally responsible for the way you use and apply this information. As a user of the Information or sites or documents in which this Information is included, you will adhere to standard fair use including avoidance of spamming, ripping, intellectual-property violations, privacy violations, and any other illegal activity.