LG

LG 65TR3BQ-B interactive whiteboard 165.1 cm (65") 3840 x 2160 pixels Touchscreen Black

Brand : LG
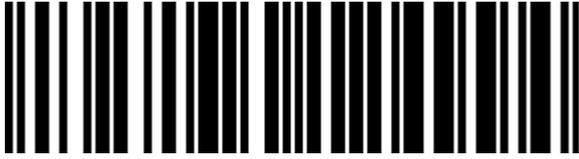
Product name : 65TR3BQ-B

Product code: 65TR3BQ-B

- Resolution : 3,840 x 2,160 (UHD)
- Brightness : 350 nits (Typ.)
- Multi-Touch : Max. 40 Points
- Easy Connection & Sharing
- User Friendly Experience
- Security & Compatibility

Interactive Digital Board 65", 3840 x 2160 (UHD), 50 nits (Typ.), Multi-Touch : Max. 40 Points
LG 65TR3BQ-B. Display diagonal: 165.1 cm (65"), Display brightness: 350 cd/m², Display resolution:
3840 x 2160 pixels. Speaker power: 16 W. Product colour: Black, Panel mounting interface: 600 x 400
mm, Certification: CB / NRTL, FCC Class "A" / CE / KC, ErP. Power consumption (max): 360 W, Power
consumption (typical): 127 W, Power consumption (off): 0.5 W. Width: 1491 mm, Height: 899 mm,
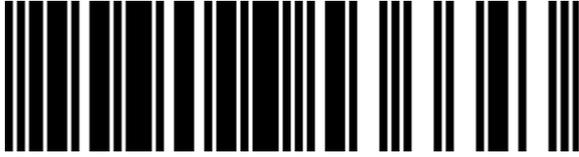Depth: 98 mm

Display

Display diagonal *	165.1 cm (65")
Display brightness	350 cd/m²
Display resolution	3840 x 2160 pixels
HD type	4K Ultra HD
Panel type	VA
LED backlight	✔
LED backlighting type	Direct-LED
Contrast ratio (typical)	5000:1
Response time	6.5 ms
Touchscreen *	✔
Touch technology	Multi-touch
Touchscreen type	Infrared
Number of simultaneous touchpoints	40
Touch system response time	10 ms
Viewing angle, horizontal	178°
Viewing angle, vertical	178°
Accuracy touch	1.5 mm

Audio

Built-in speaker(s) *	✔
Number of built-in speakers	2
Speaker power	16 W

Projector

Built-in projector *	✘

Network

Ethernet LAN	✔

Ports & interfaces

USB 2.0 ports quantity	1
USB 2.0 Type-A hub ports quantity	4
HDMI ports quantity	3
USB Type-C ports quantity	1
HDMI output ports quantity	1
RGB ports quantity	1
Ethernet LAN (RJ-45) ports	1

Ports & interfaces

S/PDIF out port	✔
RS-232 ports	1

Ergonomics

Product colour	Black
VESA mounting	✔
Panel mounting interface	600 x 400 mm
Certification	CB / NRTL, FCC Class "A" / CE / KC, ErP

Power

Power consumption (max)	360 W
Power consumption (typical)	127 W
Power consumption (off)	0.5 W
AC input voltage	100 - 240 V
AC input frequency	50 - 60 Hz

System requirements

Windows operating systems supported	✔
Mac operating systems supported	✔
Linux operating systems supported	✔

Operational conditions

Operating temperature (T-T)	0 - 40 °C
Operating relative humidity (H-H)	10 - 90%

Weight & dimensions

Width *	1491 mm
Depth	98 mm
Height *	899 mm
Weight	32.1 kg

Packaging data

Package width	1628 mm
Package depth	185 mm
Package height	1014 mm

Packaging content

Manual	✔

0195174124994

195174124994

8806096536643

Catalog Object Cloud