

#### G2LU3CCM12E

# USB-C to USB-C 5 Gbps 6.6 Ft. (2m) Cable

- Connect USB-C devices to a USB-C computer up to 6.6 ft.
- Smart cable maximizes power & speed capabilities of gadgets
- Premium cable features embedded E-marker chip
- · USB-IF certified to ensure highest standard quality
- Up to 5 Gbps data transfer rate



# **Intelligently Negotiates Power Needs**

The IOGEAR USB-C to USB-C cable features embedded E-marker chip circuitry that intelligently communicates with connected devices to identify the maximum data transfer rates and provide just the right power needed. The E-marker chip also detects and adjusts to provide overvoltage, overcurrent and over-temperature protection to avoid any possible damage.

## **Maximum Power + Fastest Charging Possible**

This smart USB-C cable negotiates the highest power needs of each of your devices to deliver the maximum power available. The USB-C to USB-C cable supports 3A and up to 60W of total power output for super fast charging from your docking station or AC adapter.

### **USB-IF Certified Cable**

Certified USB-IF cables have met the highest industry standards, are certified to be compliant to the specifications and are tested for interoperability with other USB products.

- Connect USB-C devices to a USB-C computer up to 6.6 ft.
- Smart cable maximizes power & speed capabilities of gadgets
- Premium cable features embedded E-marker chip
- · USB-IF certified to ensure highest standard quality


- Up to 5 Gbps data transfer rate
- Up to 60W (20V@3A) power delivery capability
- Compatible with all new MacBooks, Chromebook Pixel & USB-C enabled smartphones, tablets
- Compatible with Thunderbolt 3-enabled devices









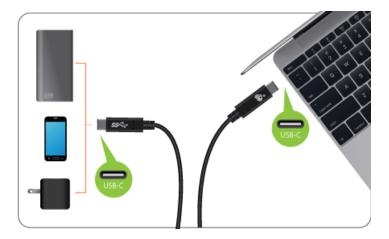

### Requirements

### **Package Contents**

- USB-C enabled device or system
- Thunderbolt 3 enabled device or system
- 1 x G1LU3CCM12E
- 1 x Warranty Card

#### **Specifications**

Function	G2LU3CCM12E
Cable Length	6.6ft (2M)
Cable Type	USB 3.1 Gen 1
Connectors	
USB-C	USB Type-C Male to USB Type-C Male
Data Rate	Up to 5Gbps
Max Output Power	20V@3A

Dimensions	G2LU3CCM12E
Unit Dimensions	
Height	0.2" (0.5 cm)
Depth	0.5" (1.25 cm)
Length	79.2" (201.17cm)
Inner Pack	
Width	7.48" (19 cm)
Height	6.1" (15.5 cm)
Length	4.7" (12 cm)
Inner Pack Qty.	6
Unit Package Dimensions	
Width	4.33" (11 cm)
Height	5.7" (14.5 cm)
Height  Length	5.7" (14.5 cm) 1.2" (3 cm)
	, ,
Length	, ,
Length Master Carton	1.2" (3 cm)
Length  Master Carton  Width	1.2" (3 cm) 15.75" (40cm)
Length  Master Carton  Width  Height	1.2" (3 cm) 15.75" (40cm) 10.24" (26cm)
Length  Master Carton  Width  Height  Depth	1.2" (3 cm)  15.75" (40cm)  10.24" (26cm)  13" (33cm)
Length  Master Carton  Width  Height  Depth  Master Carton Qty.	1.2" (3 cm)  15.75" (40cm)  10.24" (26cm)  13" (33cm)
Length  Master Carton  Width  Height  Depth  Master Carton Qty.  Weight	1.2" (3 cm)  15.75" (40cm)  10.24" (26cm)  13" (33cm)
Length  Master Carton  Width  Height  Depth  Master Carton Qty.  Weight  Master Carton Wt.	1.2" (3 cm)  15.75" (40cm)  10.24" (26cm)  13" (33cm)  48
Length  Master Carton  Width  Height  Depth  Master Carton Qty.  Weight  Master Carton Wt.  Inner Pack Wt.	1.2" (3 cm)  15.75" (40cm)  10.24" (26cm)  13" (33cm)  48  16.1lb (7.3kg)  1.77lb (0.8 kg)