LG

LG 55EW5G-V Digital signage display 139.7 cm (55') OLED 400 cd/m² Full HD Black 18/7
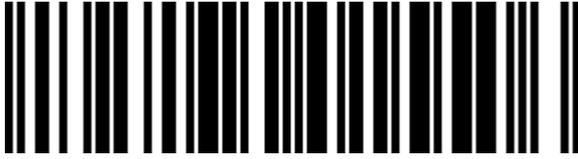
Brand : LG **Product code:** 55EW5G-V

Product name : 55EW5G-V Digital signage display 139.7 cm (55') OLED 400 cd/m² Full HD Black 18/7

- Brightness(Typ.): 400nit (APL 25%, Without Glass)
- Transparency(Typ.) : 38%
- Bezel : 7.9 mm (T/B/L), 121.7 mm (B)
- Interface : HDMI/DP/USB(2)/ RS232C/ RJ45/ Audio/ IR
55", 1920 x 1080, FHD, 400nit, 8ms, 18/7, HDMI x 1, DP x 1, USB x 2
LG 55EW5G-V Digital signage display 139.7 cm (55') OLED 400 cd/m² Full HD Black 18/7. Product design: Digital signage flat panel. Display diagonal: 139.7 cm (55"), Display technology: OLED, Display resolution: 1920 x 1080 pixels, Display brightness: 400 cd/m², HD type: Full HD. Operating hours (hours/days): 18/7. Product colour: Black

Display

Display diagonal *	139.7 cm (55")
Display technology *	OLED
Display resolution *	1920 x 1080 pixels
Display brightness *	400 cd/m²
HD type *	Full HD
Contrast ratio (typical)	150000:1
Viewing angle, horizontal	178°
Viewing angle, vertical	178°
Display number of colours	1.07 billion colours
Colour saturation	120%
Surface hardness	Hard coating (2H)

Ports & interfaces

HDMI ports quantity *	1
HDMI version	1.4
DisplayPorts quantity *	1
USB port *	✔
USB ports quantity	2
USB version	2.0
Ethernet LAN (RJ-45) ports	1
Audio (L/R) out	1
RS-232 interface	✔
RS-232C	✔
Remote (IR) input	1
Remote (IR) output	1

Audio

Built-in speaker(s) *	✘

Design

Product design *	Digital signage flat panel
Placement supported *	Indoor
Product colour *	Black
VESA mounting *	✘

Performance

Operating hours (hours/days)	18/7

Power

Power consumption (typical) *	250 W
Energy efficiency class (SDR)	G
Energy consumption (SDR) per 1000 hours	171 kWh
AC input voltage	100 - 240 V
AC input frequency	50 - 60 Hz
Heat dissipation	853.03 BTU/h
Energy efficiency scale	A to G

Weight & dimensions

Display width	12255 mm
Display depth	49 mm
Display height	8101 mm
Display weight	11.6 kg
Base depth	3.47 cm
Base height	2.38 m
Base weight	3.4 kg

Packaging content

Remote control included	✔
Cables included	AC, DisplayPort, LAN (RJ-45), RS-232

Operational conditions

Operating temperature (T-T)	0 - 40 °C
Operating relative humidity (H-H)	10 - 80%

Logistics data

Harmonized System (HS) code	85285210

Network

Ethernet LAN *	✔

Features

Heat dissipation (max)	955.39 BTU/h

0195174015506

195174015506

8806091413185

Catalog Object Cloud