




## APC APDU9959EU3 power distribution unit (PDU) 24 AC outlet(s) 0U Black

Brand : APC

Product code: APDU9959EU3

Product name : APDU9959EU3


- With Industry leading reliability, manageability, and security, APC Switched Rack PDU's provide advanced load management plus on/off outlet level power cycling and sequencing control  
- Includes: Installation guide, Locking input power cord, Rack mounting brackets, Safety guide  
Rack PDU 9000 Switched, ZeroU, 16A, 230V, (21) C13 & (3) C19, IEC309 Cord  
APC APDU9959EU3. PDU types: Switched, Rack capacity: 0U, Type: Single-phase. AC outlets quantity: 24 AC outlet(s), AC outlet types: C13 coupler, C19 coupler, Power plug: IEC 60309. Cable length: 3 m. Nominal input voltage: 230, 220 - 240 V, Maximum current: 16 A, AC input frequency: 50 - 60 Hz. Certification: EAC, EN 55022 class A, EN 55024, EN 61000-3-2, EN 61000-3-3, FCC part 15 class A, ICES-003, RCM, VDE

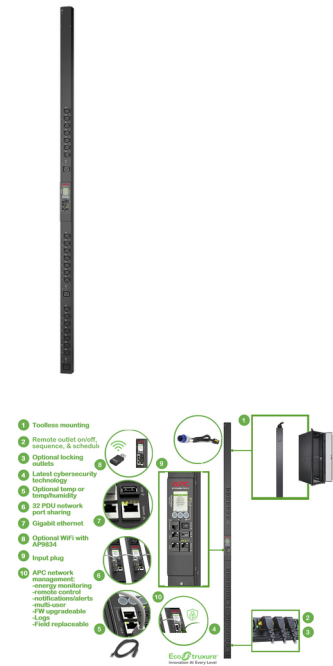

<b>Design</b>		<b>Power</b>	
PDU types *	Switched	Maximum total current draw per phase	16 A
Type	Single-phase	Maximum power	3680 W
Rack capacity *	0U	<b>Certificates</b>	
Mounting	Vertical	EAC, EN 55022 class A, EN 55024, EN 61000-3-2, EN 61000-3-3, FCC part 15 class A, ICES-003, RCM, VDE	
Product colour	Black	<b>Operational conditions</b>	
Display	LCD	Operating temperature (T-T)	-5 - 45 °C
On/off switch	✗	Storage temperature (T-T)	-25 - 65 °C
<b>Ports &amp; interfaces</b>		Operating relative humidity (H-H)	0 - 95%
AC outlets quantity *	24 AC outlet(s)	Storage relative humidity (H-H)	5 - 95%
Power plug	IEC 60309	Operating altitude	0 - 3048 m
AC outlet types *	C13 coupler, C19 coupler	Non-operating altitude	0 - 15240 m
<b>Features</b>		<b>Weight &amp; dimensions</b>	
Daisy chain	✓	Width	55 mm
Cable length	3 m	Depth	46 mm
<b>Power</b>		Height	1794 mm
Nominal input voltage *	230, 220 - 240 V	Weight	5.61 kg
AC input frequency	50 - 60 Hz	<b>Packaging data</b>	
Maximum current *	16 A	Package weight	8.59 kg
Nominal output voltage	239 V	Package width	165 mm
Output voltage	230 V	Package depth	114 mm
Load capacity	3680 VA	Package height	2002 mm
Maximum input current per phase	16 A		



0731304356295



731304356295

### Catalog Object Cloud



Disclaimer. The information published here (the "Information") is based on sources that can be considered reliable, typically the manufacturer, but this Information is provided "AS IS" and without guarantee of correctness or completeness. The Information is only indicative and can be changed at any time without notification. No rights can be based on the Information. Suppliers or aggregators of this Information do not accept any liability with regard to the content of (web)pages and other documents, including its Information. The publisher of the Information can not be held liable for the content of 3rd party websites that are linking this Information or are linked to from this Information. You as the User of the Information are solely responsible for the choice and usage of this Information. You are not entitled to transfer, copy or otherwise multiply or distribute the Information. You are obliged to follow the directions of the copyright owner(s) with regard to the use of the Information. Exclusively Dutch law is applicable. With regard to price and stock data on the site, the publisher followed a number of starting points, which are not necessarily relevant for your private or business circumstances. Therefore, the price and stock data are only indicative and are subject to changes. You are personally responsible for the way you use and apply this information. As a user of the Information or sites or documents in which this Information is included, you will adhere to standard fair use including avoidance of spamming, ripping, intellectual-property violations, privacy violations, and any other illegal activity. Automated scraping, data mining, or harvesting for the purpose of training machine learning models, neural networks, or artificial intelligence systems is strictly prohibited without a commercial license.