



APC BE650G1-CN uninterruptible power supply (UPS) Standby (Offline) 0.65 kVA 390 W 8 AC outlet(s)

Brand : APC

Product code: BE650G1-CN

Product name : BE650G1-CN




390Watts/650VA, NEMA 5-15R, 120V, 1.5m


APC BE650G1-CN. UPS topology: Standby (Offline), Output power capacity: 0.65 kVA, Output power: 390 W. AC outlet types: NEMA 5-15R, AC outlets quantity: 8 AC outlet(s), Cabling technology: 10/100Base-T. Battery technology: Sealed Lead Acid (VRLA), Battery capacity: 79 Ah, Battery life (max): 5 year(s). Form factor: Compact, Product colour: Black, Cable length: 1.5 m. Width: 180 mm, Depth: 302 mm, Height: 88 mm



Features		Battery	
UPS topology *	Standby (Offline)	Battery recharge time	24 h
Output power capacity *	0.65 kVA	Design	
Output power *	390 W	Form factor *	Compact
Waveform *	Sine	Cable length	1.5 m
Input operation voltage (min) *	90 V	Product colour *	Black
Input operation voltage (max) *	140 V	Operational conditions	
Input frequency *	60 Hz	Operating temperature (T-T)	0 - 40 °C
Output operation voltage (min)	120 V	Storage temperature (T-T)	-15 - 45 °C
Output operation voltage (max)	120 V	Operating relative humidity (H-H)	5 - 95%
Output frequency	60 Hz	Operating altitude	0 - 3048 m
Maximum current	12 A	Non-operating altitude	0 - 15240 m
Surge energy rating	340 J	Weight & dimensions	
Response time	8 ms	Width	180 mm
Noise level	45 dB	Depth	302 mm
Ports & interfaces		Height	88 mm
AC outlet types	NEMA 5-15R	Weight	6.2 kg
AC outlets quantity	8 AC outlet(s)	Packaging data	
USB port	✓	Package width	235 mm
Ethernet LAN (RJ-45) ports	2	Package depth	393 mm
Cabling technology	10/100Base-T	Package height	128 mm
Battery		Package weight	7 kg
Battery technology	Sealed Lead Acid (VRLA)	Logistics data	
Battery capacity	79 Ah	Master (outer) case width	279 mm
Battery life (max)	5 year(s)	Master (outer) case length	406 mm
		Master (outer) case height	254 mm
		Master (outer) case gross weight	14.4 kg

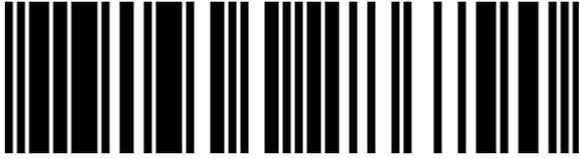

0731304286790



731304286790

Catalog Object Cloud



Disclaimer. The information published here (the "Information") is based on sources that can be considered reliable, typically the manufacturer, but this Information is provided "AS IS" and without guarantee of correctness or completeness. The Information is only indicative and can be changed at any time without notification. No rights can be based on the Information. Suppliers or aggregators of this Information do not accept any liability with regard to the content of (web)pages and other documents, including its Information. The publisher of the Information can not be held liable for the content of 3rd party websites that are linking this Information or are linked to from this Information. You as the User of the Information are solely responsible for the choice and usage of this Information. You are not entitled to transfer, copy or otherwise multiply or distribute the Information. You are obliged to follow the directions of the copyright owner(s) with regard to the use of the Information. Exclusively Dutch law is applicable. With regard to price and stock data on the site, the publisher followed a number of starting points, which are not necessarily relevant for your private or business circumstances. Therefore, the price and stock data are only indicative and are subject to changes. You are personally responsible for the way you use and apply this information. As a user of the Information or sites or documents in which this Information is included, you will adhere to standard fair use including avoidance of spamming, ripping, intellectual-property violations, privacy violations, and any other illegal activity.