PHILIPS

Philips 43BDL3017P/00 Signage Display Digital signage flat panel 109.2 cm (43") IPS 700 cd/m² 4K Ultra HD Black

Brand : Philips

**Product name :** 43BDL3017P/00

Product code: 43BDL3017P/00

- 43"
- UHD Panel
- 700 cd/m²

Signage Solutions P-Line Display, 43", 3840 x 2160, 700 cd/m², 16:9, 8 ms, speakers 2 x 10 W RMS
Philips 43BDL3017P/00. Product design: Digital signage flat panel. Display diagonal: 109.2 cm (43"),
Display technology: IPS, Display resolution: 3840 x 2160 pixels, Display brightness: 700 cd/m², HD type:
4K Ultra HD. Product colour: Black

Display

Panel type	IPS
Display diagonal *	109.2 cm (43")
Display technology *	IPS
Display resolution *	3840 x 2160 pixels
Display brightness *	700 cd/m²
HD type *	4K Ultra HD
Touchscreen *	✗
Native aspect ratio	16:9
Response time	8 ms
Contrast ratio (typical)	1200:1
Contrast ratio (dynamic)	500000:1
Viewing angle, vertical	178°
Display number of colours	1.07 billion colours
Pixel pitch	0.2451 x 0.2451 mm
Display diagonal (metric)	108 cm
Haze rate	25%

Ports & interfaces

HDMI ports quantity *	3
HDMI version	2.0
DVI port *	✔
DVI-I ports quantity	1
DisplayPorts quantity *	2
USB port *	✔
USB ports quantity	1
USB version	2.0
Ethernet LAN (RJ-45) ports	1
Audio (L/R) in	1
Audio (L/R) out	1
RS-232C	✔
Remote (IR) input	1
Remote (IR) output	1
Card reader integrated	✔
Compatible memory cards	MicroSD (TransFlash)

Audio

Built-in speaker(s) *	✔
Number of built-in speakers	2
RMS rated power	10 W

Design

Product design *	Digital signage flat panel
Placement supported *	Indoor

Performance

Purpose *	Healthcare
On Screen Display (OSD)	✔
On Screen Display (OSD) languages	Arabic, Simplified Chinese, Traditional Chinese, Danish, German, Dutch, English, Spanish, Finnish, French, Italian, Japanese, Norwegian, Polish, Portuguese, Russian, Swedish, Turkish
Mean time between failures (MTBF)	60000 h

Power

Power consumption (typical) *	100 W
Power consumption (standby) *	0.5 W
Energy efficiency class (SDR)	G
Energy consumption (SDR) per 1000 hours	95 kWh
AC input voltage	100 - 240 V
AC input frequency	50 - 60 Hz
Energy efficiency scale	A to G

Computer system

Video formats supported	H.264, M-JPEG, MPEG1, WMV3
Audio formats supported	AAC
Image formats supported	BMP, JPEG, PNG

Weight & dimensions

Width	973 mm
Depth	76.8 mm
Height	561.2 mm
Weight	13.9 kg

Packaging content

Remote control included	✔
Batteries included	✔
Cables included	AC, IR sensor, RS-232

Operational conditions

Operating temperature (T-T)	0 - 40 °C
Operating relative humidity (H-H)	20 - 80%
Storage temperature (T-T)	-20 - 60 °C
Storage relative humidity (H-H)	5 - 95%

Certificates

Certification	CE CCC BSMI CB VCCI CECP EAC PSB EMF ETL FCC, Class A

Design

Orientation	Horizontal/Vertical
Product colour *	Black
VESA mounting *	✔
Panel mounting interface	400 x 400 mm

Logistics data

Harmonized System (HS) code	85285210

Network

Ethernet LAN *	✔
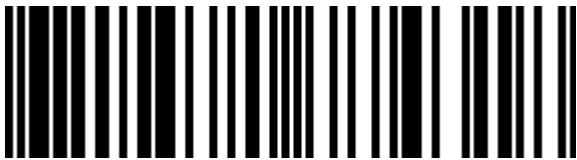
8712581774318
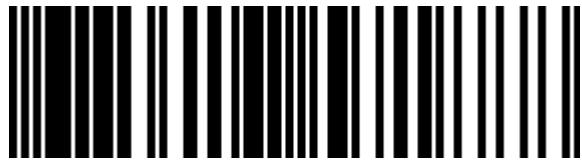
0685417571888

685417571888

Catalog Object Cloud