DATA SHEET

USB-C to C 3.1 (Gen 2) Male to Female Extension Cable (10Gbps)

Extend the distance of a USB-C connection

OVERVIEW

The USB-C to C 3.1 (Gen 2) Male to Female Extension Cable is perfect for extending a USB-C connection on a USB-C equipped laptop, smartphone, or tablet. The extension cable supports fast charging and data transfer speeds up to 10Gbps.

The USB-C connector has a symmetrical design which is identical on both sides, so no more worrying about whether it's upside-down or right-side-up. It will plug in the first time, every time—while preventing damage to the connector port from frequent plugging and unplugging.

FEATURES

- USB-C Male to USB-C Female connection
- Data transfer speeds up to 10Gbps
- 3A charging output
- Compatible with USB-C and Thunderbolt™ 3 ports
- Reversible, symmetrical USB-C connector

ITEM DESCRIPTION

28657	1ft USB-C to C 3.1 (Gen 2) Male to Female Extension Cable (10Gbps)
28658	3ft USB-C to C 3.1 (Gen 2) Male to Female Extension Cable (10Gbps)

C2G®

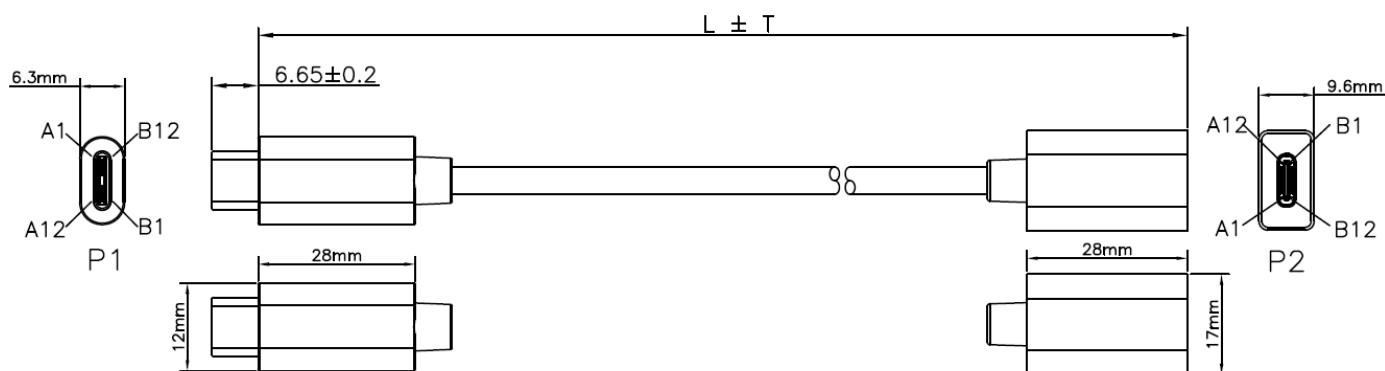A brand of 🔲legrand®
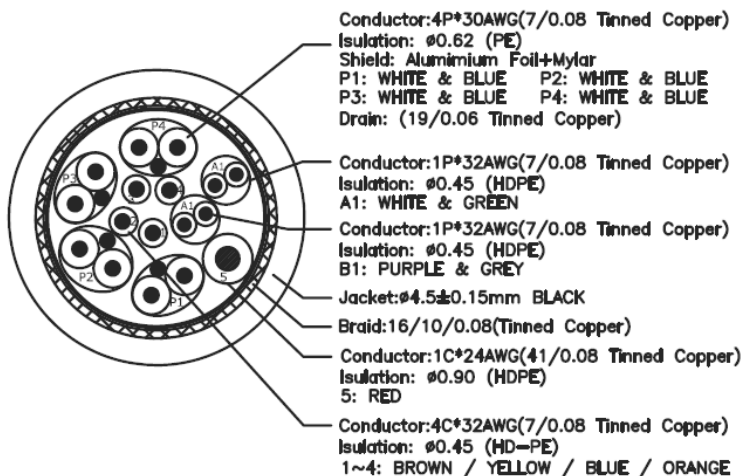
DATA SHEET

ELECTRICAL SPECIFICATIONS:

- USB 3.1 ~ [32AWG (7/0.08TC)+EAM]*4P+32AWG(7/0.08TC) *2P+32AWG(7/0.08TC)*4C+24AWG(41/0.08TC)+EAB(16*10/0.08TC 85%TC)OD:4.5mm ~ Black

- Rated Temperature: 80°C ; Voltage: 30V

- Conductor Resistance: At 20°C max 32AWG: 588.5 OHMS/KM

- Insulation Resistance: 10M-KM min at 20°C DC 500V. (EIA—364—21)

- Dielectric Strength: AC 500V/1 Minute No Breakdown. (EIA—364—20)

PHYSICAL SPECIFICATIONS:

- Operating Temperature: 0 ~ +50°C; 15-85% RH (Non-Condensing)

- Storage Temperature: -25 ~ +70°C; 15-85% RH (Non-Condensing)

- Connector: P1: USB3.1 C Type Male: Contacts Terminal Gold Flash, Nickel Plated Shell; Black Insulation

- Connector: P2: USB3.1 C Type Female: Contacts Terminal Gold Flash, Nickel Plated Shell; Black Insulation

- Molding Material: P1: Black PVC Conform RoHS

- Molding Material: P2: Black PVC Conform RoHS

- Product is CE marked and conforms to 2011/65/EU RoHS2

CABLE Cross Section.:

Conductor:4P*30AWG(7/0.08 Tinned Copper)
Isulation: ø0.62 (PE)
Shield: Alumimium Foil+Mylar
P1: WHITE & BLUE   P2: WHITE & BLUE
P3: WHITE & BLUE   P4: WHITE & BLUE
Drain: (19/0.06 Tinned Copper)

Conductor:1P*32AWG(7/0.08 Tinned Copper)
Isulation: ø0.45 (HDPE)
A1: WHITE & GREEN

Conductor:1P*32AWG(7/0.08 Tinned Copper)
Isulation: ø0.45 (HDPE)
B1: PURPLE & GREY

Jacket:ø4.5±0.15mm BLACK

Braid:16/10/0.08(Tinned Copper)

Conductor:1C*24AWG(41/0.08 Tinned Copper)
Isulation: ø0.90 (HDPE)
5: RED

Conductor:4C*32AWG(7/0.08 Tinned Copper)
Isulation: ø0.45 (HD—PE)
1~4: BROWN / YELLOW / BLUE / ORANGE

C2G®

A brand of legrand®

6500 Poe Avenue
Dayton, OH 45414
Phone: 800.CABL.911
www.c2g.com

Follow Us