

## APC SMT3000I

Brand : APC Product code: SMT3000I

Product name: SMT3000I

Smart-UPS 3000VA LCD 230V

APC SMT3000I:

## **Intuitive LCD interface**

Provides clear and accurate information in multiple languages with the ability to configure the UPS locally with easy to use navigation keys.

## Predictive replace battery date

Dynamically provides the month and year when battery replacement is recommended to aide in long term maintenance planning.

## Green mode

Patent-pending operating mode that bypasses unused electrical components in good power conditions to achieve very high operating efficiency without sacrificing any protection.

#### **Energy meter**

USB port SmartSlot **Battery** 

Battery technology

Battery capacity


Provides actual kilowatt hours of usage for energy conscious users.

## Sequenced shutdown and restart

Configure select outlet groups to shut down and turn on in a pre-determined order (for UPSs with switched outlet groups).

## Pure sine wave output on battery

Simulates utility power to provide the highest degree of compatibility for active PFC (power factor corrected) servers and sensitive electronics.

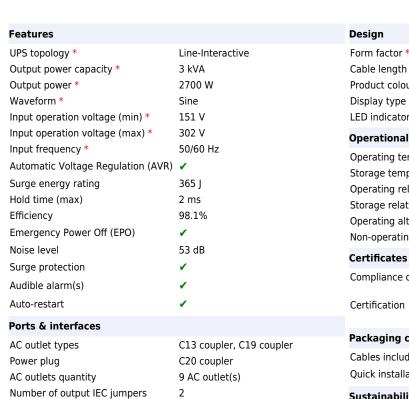

Sealed Lead Acid (VRLA)

816 VAh





Product colour * Display type	Black LCD	
LED indicators	Status	
Operational conditions		
Operating temperature (T-T) Storage temperature (T-T) Operating relative humidity (H-H) Storage relative humidity (H-H) Operating altitude Non-operating altitude	0 - 40 °C -15 - 45 °C 0 - 95% 0 - 95% 0 - 3000 m 0 - 15000 m	
Certificates		
Compliance certificates  Certification	RoHS CE, CSA, EAC, EN/IEC 62040-1, EN/IEC 62040-2, RCM, VDE, REACH, PEP, EOLI	
Packaging content		
Cables included Quick installation guide	RS-232, USB cable ✓	
Sustainability		
Sustainability certificates	Green Premium	
Weight & dimensions		
Width Depth Height	197 mm 544 mm 435 mm	

Tower

1.83 m

Battery		Weight & dimensions	
Typical backup time at full load 5.1 min  Typical backup time at half load 17.2 min	Weight	52.5 kg	
	Packaging data		
Battery life (max) Battery recharge time	5 year(s) 3 h	Software CD	✓
Hot-swap battery		Package width	381 mm
Automatic battery test ✓ Cold start ✓	Package depth	762 mm	
	•	Package height	699 mm
	•	Package weight	63.7 kg
		Logistics data	
	Products per pallet	9 pc(s)	
		Other features	
	Nominal output voltage Nominal input voltage	230 V 230 V	





731304268710

0731304268710

# **Catalog Object Cloud**



Disclaimer. The information published here (the "Information") is based on sources that can be considered reliable, typically the manufacturer, but this Information is provided "AS IS" and without guarantee of correctness or completeness. The Information is only indicative and can be changed at any time without notification. No rights can be based on the Information. Suppliers or aggregators of this Information do not accept any liability with regard to the content of (web)pages and other documents, including its Information. The publisher of the Information can not be held liable for the content of 3rd party websites that are linking this Information or are linked to from this Information. You as the User of the Information are solely responsible for the choice and usage of this Information. You are not entitled to transfer, copy or otherwise multiply or distribute the Information. You are obliged to follow the directions of the copyright owner(s) with regard to the use of the Information. Exclusively Dutch law is applicable. With regard to price and stock data on the site, the publisher followed a number of starting points, which are not necessarily relevant for your private or business circumstances. Therefore, the price and stock data are only indicative and are subject to changes. You are personally responsible for the way you use and apply this information. As a user of the Information or sites or documents in which this Information is included, you will adhere to standard fair use including avoidance of spamming, ripping, intellectual-property violations, privacy violations, and any other illegal activity.