



APC SMT3000I

Brand : APC

Product code: SMT3000I

Product name : SMT3000I

Smart-UPS 3000VA LCD 230V

APC SMT3000I:

Intuitive LCD interface

Provides clear and accurate information in multiple languages with the ability to configure the UPS locally with easy to use navigation keys.

Predictive replace battery date

Dynamically provides the month and year when battery replacement is recommended to aide in long term maintenance planning.

Green mode

Patent-pending operating mode that bypasses unused electrical components in good power conditions to achieve very high operating efficiency without sacrificing any protection.

Energy meter

Provides actual kilowatt hours of usage for energy conscious users.

Sequenced shutdown and restart

Configure select outlet groups to shut down and turn on in a pre-determined order (for UPSs with switched outlet groups).


Pure sine wave output on battery

Simulates utility power to provide the highest degree of compatibility for active PFC (power factor corrected) servers and sensitive electronics.



Features		Design	
UPS topology *	Line-Interactive	Form factor *	Tower
Output power capacity *	3 kVA	Cable length	1.83 m
Output power *	2700 W	Product colour *	Black
Waveform *	Sine	Display type	LCD
Input operation voltage (min) *	151 V	LED indicators	Status
Input operation voltage (max) *	302 V	Operational conditions	
Input frequency *	50/60 Hz	Operating temperature (T-T)	0 - 40 °C
Automatic Voltage Regulation (AVR) ✓		Storage temperature (T-T)	-15 - 45 °C
Surge energy rating	365 J	Operating relative humidity (H-H)	0 - 95%
Hold time (max)	2 ms	Storage relative humidity (H-H)	0 - 95%
Efficiency	98.1%	Operating altitude	0 - 3000 m
Emergency Power Off (EPO) ✓		Non-operating altitude	0 - 15000 m
Noise level	53 dB	Certificates	
Surge protection ✓		Compliance certificates	RoHS
Audible alarm(s) ✓		Certification	CE, CSA, EAC, EN/IEC 62040-1, EN/IEC 62040-2, RCM, VDE, REACH, PEP, EOLI
Auto-restart ✓		Packaging content	
Ports & interfaces		Cables included	RS-232, USB cable
AC outlet types	C13 coupler, C19 coupler	Quick installation guide	✓
Power plug	C20 coupler	Sustainability	
AC outlets quantity	9 AC outlet(s)	Sustainability certificates	Green Premium
Number of output IEC jumpers	2	Weight & dimensions	
USB port ✓		Width	197 mm
SmartSlot ✓		Depth	544 mm
Battery		Height	435 mm
Battery technology	Sealed Lead Acid (VRLA)		
Battery capacity	816 VAh		

Battery		Weight & dimensions	
Typical backup time at full load	5.1 min	Weight	52.5 kg
Typical backup time at half load	17.2 min	Packaging data	
Battery life (max)	5 year(s)	Software CD	✓
Battery recharge time	3 h	Package width	381 mm
Hot-swap battery	✓	Package depth	762 mm
Automatic battery test	✓	Package height	699 mm
Cold start	✓	Package weight	63.7 kg
		Logistics data	
		Products per pallet	9 pc(s)
		Other features	
		Nominal output voltage	230 V
		Nominal input voltage	230 V

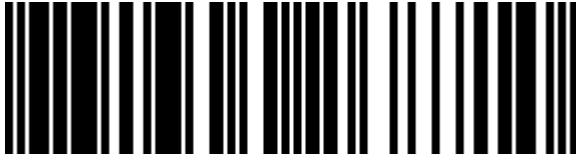

0731304268710



731304268710

Catalog Object Cloud



Disclaimer. The information published here (the "Information") is based on sources that can be considered reliable, typically the manufacturer, but this Information is provided "AS IS" and without guarantee of correctness or completeness. The Information is only indicative and can be changed at any time without notification. No rights can be based on the Information. Suppliers or aggregators of this Information do not accept any liability with regard to the content of (web)pages and other documents, including its Information. The publisher of the Information can not be held liable for the content of 3rd party websites that are linking this Information or are linked to from this Information. You as the User of the Information are solely responsible for the choice and usage of this Information. You are not entitled to transfer, copy or otherwise multiply or distribute the Information. You are obliged to follow the directions of the copyright owner(s) with regard to the use of the Information. Exclusively Dutch law is applicable. With regard to price and stock data on the site, the publisher followed a number of starting points, which are not necessarily relevant for your private or business circumstances. Therefore, the price and stock data are only indicative and are subject to changes. You are personally responsible for the way you use and apply this information. As a user of the Information or sites or documents in which this Information is included, you will adhere to standard fair use including avoidance of spamming, ripping, intellectual-property violations, privacy violations, and any other illegal activity.