

Viewsonic VP Series 3268A-4K computer monitor 81.3 cm (32") 3840 x 2160 pixels 4K Ultra HD LED Black



Brand : Viewsonic

Product family: VP Series

Product code: VP3268A-4K

Product name : 3268A-4K

- 100% sRGB and 100% Rec.709 colour coverage
- USB-C connectivity with 90W power delivery
- Certification validated by Pantone
- 4K Ultra HD resolution
- World 1st TÜV SÜD tested color blindness mode
- Delta E < 2 colour accuracy

32", 4K, 3840 x 2160, UHD, 100% sRGB, 350 cd/m², 60 Hz, HDMI x 2

Viewsonic VP Series 3268A-4K. Display diagonal: 81.3 cm (32"), Display resolution: 3840 x 2160 pixels, HD type: 4K Ultra HD, Display technology: LED, Response time: 5 ms, Native aspect ratio: 16:9, Viewing angle, horizontal: 178°, Viewing angle, vertical: 178°. Built-in speaker(s). Built-in USB hub, USB hub version: 3.2 Gen 1 (3.1 Gen 1). VESA mounting, Height adjustment. Product colour: Black

Display

| | |
|------------------------------|-----------------------|
| Display diagonal * | 81.3 cm (32") |
| Display resolution * | 3840 x 2160 pixels |
| HD type * | 4K Ultra HD |
| Native aspect ratio * | 16:9 |
| Display technology * | LED |
| Panel type * | IPS |
| Backlight type | LED |
| Touchscreen * | ✗ |
| Display brightness (typical) | 350 cd/m ² |
| Response time * | 5 ms |
| Anti-glare screen | ✓ |
| Screen shape * | Flat |
| Contrast ratio (typical) * | 1300:1 |
| Contrast ratio (dynamic) | 2000000:1 |
| Maximum refresh rate * | 60 Hz |
| Viewing angle, horizontal | 178° |
| Viewing angle, vertical | 178° |
| Display number of colours * | 1.07 billion colours |
| Pixel pitch | 0.182 x 0.182 mm |
| Digital horizontal frequency | 15 - 135 kHz |
| Digital vertical frequency | 24 - 75 Hz |
| Colour depth | 10 bit |
| sRGB coverage (typical) | 113% |
| NTSC coverage (typical) | 80% |

Performance

| | |
|---------------------------|---|
| Flicker-free technology | ✓ |
| Low Blue Light technology | ✓ |

Multimedia

| | |
|-----------------------|-----|
| Number of speakers | 2 |
| RMS rated power | 5 W |
| Built-in speaker(s) * | ✓ |

Ergonomics

| | |
|--------------------------|--------------|
| VESA mounting * | ✓ |
| Panel mounting interface | 100 x 100 mm |
| Cable lock slot * | ✓ |
| Cable lock slot type | Kensington |
| Height adjustment * | ✓ |
| Adjustable height (max) | 13 cm |
| Pivot | ✓ |
| Pivot angle | -90 - 90° |
| Swivelling | ✓ |
| Swivel angle range | 0 - 120° |
| Tilt adjustment | ✓ |
| Tilt angle range | -5 - 21° |


Power

| | |
|---|-------------|
| Energy efficiency class (SDR) * | G |
| Energy efficiency class (HDR) * | G |
| Energy consumption (SDR) per 1000 hours * | 33 kWh |
| Energy consumption (HDR) per 1000 hours * | 48 kWh |
| Power consumption (typical) * | 46 W |
| Power consumption (standby) * | 0.5 W |
| Power consumption (max) | 51 W |
| AC input voltage | 100 - 240 V |
| AC input frequency | 50 - 60 Hz |
| Energy efficiency scale | A to G |

Operational conditions

| | |
|-----------------------------------|-----------|
| Operating temperature (T-T) | 0 - 40 °C |
| Operating relative humidity (H-H) | 20 - 90% |

| Design | | Weight & dimensions | |
|--|------------------------|-----------------------------|--|
| Product colour * | Black | Width (with stand) | 714 mm |
| Ports & interfaces | | Weight & dimensions | |
| Built-in USB hub * | ✓ | Depth (with stand) | 265 mm |
| USB hub version | 3.2 Gen 1 (3.1 Gen 1) | Height (with stand) | 636.1 mm |
| USB upstream port type | USB Type-B, USB Type-C | Weight (with stand) | 10.7 kg |
| Number of USB Type-B upstream ports quantity | 1 | Width (without stand) | 714 mm |
| Number of USB Type-C upstream ports quantity | 1 | Depth (without stand) | 53 mm |
| USB Type-A downstream ports quantity | 2 | Height (without stand) | 410 mm |
| HDMI * | ✓ | Weight (without stand) | 6.8 kg |
| HDMI ports quantity | 2 | Packaging data | |
| HDMI version | 2.0 | Package width | 835 mm |
| DisplayPorts quantity | 1 | Package depth | 320 mm |
| DisplayPort version | 1.4 | Package height | 575 mm |
| Audio output | ✓ | Package weight | 16.4 kg |
| Headphone out * | ✓ | Packaging content | |
| | | Cables included | HDMI, USB Type-A to USB Type-B, USB Type-C |
| | | Quick start guide | ✓ |
| Logistics data | | Logistics data | |
| | | Harmonized System (HS) code | 85285210 |

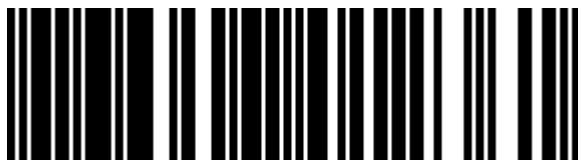

766907012361

0766907012361

Catalog Object Cloud



Disclaimer. The information published here (the "Information") is based on sources that can be considered reliable, typically the manufacturer, but this Information is provided "AS IS" and without guarantee of correctness or completeness. The Information is only indicative and can be changed at any time without notification. No rights can be based on the Information. Suppliers or aggregators of this Information do not accept any liability with regard to the content of (web)pages and other documents, including its Information. The publisher of the Information can not be held liable for the content of 3rd party websites that are linking this Information or are linked to from this Information. You as the User of the Information are solely responsible for the choice and usage of this Information. You are not entitled to transfer, copy or otherwise multiply or distribute the Information. You are obliged to follow the directions of the copyright owner(s) with regard to the use of the Information. Exclusively Dutch law is applicable. With regard to price and stock data on the site, the publisher followed a number of starting points, which are not necessarily relevant for your private or business circumstances. Therefore, the price and stock data are only indicative and are subject to changes. You are personally responsible for the way you use and apply this information. As a user of the Information or sites or documents in which this Information is included, you will adhere to standard fair use including avoidance of spamming, ripping, intellectual-property violations, privacy violations, and any other illegal activity.