



## APC SMX750C uninterruptible power supply (UPS) Line-Interactive 0.75 kVA 675 W 8 AC outlet(s)

Brand : APC

Product code: SMX750C

Product name : SMX750C

675 Watts / 750VA, black, 50/60 Hz, 22.05 kg, 40 dBA

[APC SMX750C uninterruptible power supply \(UPS\) Line-Interactive 0.75 kVA 675 W 8 AC outlet\(s\):](#)

### APC Smart-UPS X 750VA Rack/Tower LCD 120V with SmartConnect Port


- Intelligent and efficient network power protection from entry level to scaleable runtime. Ideal UPS for servers, point-of-sale, routers, switches, hubs and other ...

- Includes: Cat 5 Ethernet cable, Installation guide, Rack mounting brackets, Removable support feet, Smart UPS signalling RS-232 cable, USB cable, Warranty card

APC SMX750C. UPS topology: Line-Interactive, Output power capacity: 0.75 kVA, Output power: 675 W. AC outlet types: NEMA 5-15R, AC outlets quantity: 8 AC outlet(s). Battery technology: Sealed Lead Acid (VRLA), Battery recharge time: 3 h. Form factor: Rackmount/Tower, Product colour: Black, Rack capacity: 2U. Width: 89 mm, Depth: 490 mm, Height: 432 mm



Features		Design	
UPS topology *	Line-Interactive	Form factor *	Rackmount/Tower
Output power capacity *	0.75 kVA	Rack capacity	2U
Output power *	675 W	Cable length	2.4 m
Waveform *	Sawtooth	Product colour *	Black
Input operation voltage (min) *	75 V	Display type	LCD
Input operation voltage (max) *	154 V	LED indicators	✓
Input frequency *	50/60 Hz	<b>Operational conditions</b>	
Output operation voltage (min)	120 V	Operating temperature (T-T)	0 - 40 °C
Output operation voltage (max)	120 V	Storage temperature (T-T)	-15 - 45 °C
Maximum current	12 A	Operating relative humidity (H-H)	0 - 95%
Surge energy rating	645 J	Storage relative humidity (H-H)	0 - 95%
Emergency Power Off (EPO)	✓	Operating altitude	0 - 3048 m
Output voltage Total Harmonic Distortion (THD)	5%	Non-operating altitude	0 - 15240 m
Noise level	40 dB	<b>Weight &amp; dimensions</b>	
Audible alarm(s)	✓	Width	89 mm
<b>Ports &amp; interfaces</b>		Depth	490 mm
AC outlet types	NEMA 5-15R	Height	432 mm
AC outlets quantity	8 AC outlet(s)	Weight	22.1 kg
<b>Battery</b>		<b>Packaging data</b>	
Battery technology	Sealed Lead Acid (VRLA)	Package width	246 mm
Battery recharge time	3 h	Package depth	620 mm
		Package height	589 mm
		Package weight	26.5 kg

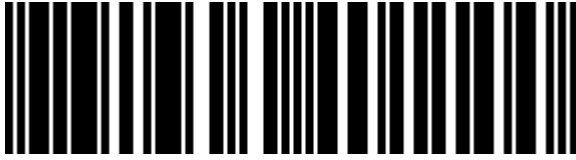

0731304401100



731304401100

### Catalog Object Cloud



Disclaimer. The information published here (the "Information") is based on sources that can be considered reliable, typically the manufacturer, but this Information is provided "AS IS" and without guarantee of correctness or completeness. The Information is only indicative and can be changed at any time without notification. No rights can be based on the Information. Suppliers or aggregators of this Information do not accept any liability with regard to the content of (web)pages and other documents, including its Information. The publisher of the Information can not be held liable for the content of 3rd party websites that are linking this Information or are linked to from this Information. You as the User of the Information are solely responsible for the choice and usage of this Information. You are not entitled to transfer, copy or otherwise multiply or distribute the Information. You are obliged to follow the directions of the copyright owner(s) with regard to the use of the Information. Exclusively Dutch law is applicable. With regard to price and stock data on the site, the publisher followed a number of starting points, which are not necessarily relevant for your private or business circumstances. Therefore, the price and stock data are only indicative and are subject to changes. You are personally responsible for the way you use and apply this information. As a user of the Information or sites or documents in which this Information is included, you will adhere to standard fair use including avoidance of spamming, ripping, intellectual-property violations, privacy violations, and any other illegal activity.