



APC SMTL3000RM2UC uninterruptible power supply (UPS) Line-Interactive 3 kVA 2700 W 8 AC outlet(s)

Brand : APC

Product code: SMTL3000RM2UC

Product name : SMTL3000RM2UC



Smart-UPS, Lithium-Ion, 3000VA, 120V with SmartConnect Port

APC SMTL3000RM2UC uninterruptible power supply (UPS) Line-Interactive 3 kVA 2700 W 8 AC outlet(s):

Intelligent and efficient network power protection from entry level to scaleable runtime. Ideal UPS for servers, point-of-sale, routers, switches, hubs and other network devices.


APC SMTL3000RM2UC. UPS topology: Line-Interactive, Output power capacity: 3 kVA, Output power: 2700 W. AC outlet types: NEMA 5-15R, NEMA 5-20R, AC outlets quantity: 8 AC outlet(s), Serial interface type: RJ-45. Battery technology: Lithium-Ion (Li-Ion), Typical backup time at full load: 4 min, Typical backup time at half load: 8 min. Form factor: Rackmount, Product colour: Black, Silver, Rack capacity: 2U. Certification: CSA C22.2 No 107.1, CULus, FCC part 15 class A, UL 1778, UL 1973



Features		Battery	
UPS topology *	Line-Interactive	Typical backup time at half load	8 min
Output power capacity *	3 kVA	Design	
Output power *	2700 W	Form factor *	Rackmount
Waveform *	Sine	Rack capacity	2U
Input operation voltage (min) *	82 V	Product colour *	Black, Silver
Input operation voltage (max) *	144 V	Display type	LCD
Input frequency *	50/60 Hz	LED indicators	✓
Output operation voltage (min)	120 V	International Protection (IP) code	IP20
Output operation voltage (max)	120 V	Operational conditions	
Output frequency	50/60 Hz	Operating temperature (T-T)	0 - 40 °C
Output voltage regulation	5%	Storage temperature (T-T)	-15 - 45 °C
Surge energy rating	459 J	Operating relative humidity (H-H)	0 - 95%
Efficiency	96%	Storage relative humidity (H-H)	0 - 95%
Output voltage Total Harmonic Distortion (THD)	5%	Operating altitude	0 - 3000 m
Noise level	55 dB	Non-operating altitude	0 - 7620 m
Ports & interfaces		Certificates	
AC outlet types	NEMA 5-15R, NEMA 5-20R	Certification	CSA C22.2 No 107.1, CULus, FCC part 15 class A, UL 1778, UL 1973
AC outlets quantity	8 AC outlet(s)	Weight & dimensions	
USB port	✓	Width	432.1 mm
Serial interface	✓	Depth	683 mm
Serial interface type	RJ-45	Height	86.1 mm
Ethernet LAN (RJ-45) ports	1	Weight	34.2 kg
SmartSlot	✓	Packaging data	
Battery		Package width	600 mm
Battery technology	Lithium-Ion (Li-Ion)	Package depth	980.4 mm
Typical backup time at full load	4 min	Package height	254 mm

Packaging data

Package weight	42.7 kg
----------------	---------

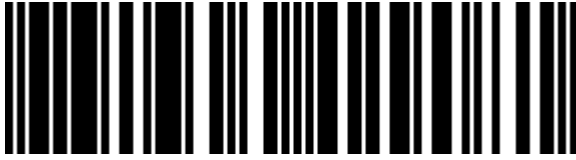

0731304429081



731304429081

Catalog Object Cloud



Disclaimer. The information published here (the "Information") is based on sources that can be considered reliable, typically the manufacturer, but this Information is provided "AS IS" and without guarantee of correctness or completeness. The Information is only indicative and can be changed at any time without notification. No rights can be based on the Information. Suppliers or aggregators of this Information do not accept any liability with regard to the content of (web)pages and other documents, including its Information. The publisher of the Information can not be held liable for the content of 3rd party websites that are linking this Information or are linked to from this Information. You as the User of the Information are solely responsible for the choice and usage of this Information. You are not entitled to transfer, copy or otherwise multiply or distribute the Information. You are obliged to follow the directions of the copyright owner(s) with regard to the use of the Information. Exclusively Dutch law is applicable. With regard to price and stock data on the site, the publisher followed a number of starting points, which are not necessarily relevant for your private or business circumstances. Therefore, the price and stock data are only indicative and are subject to changes. You are personally responsible for the way you use and apply this information. As a user of the Information or sites or documents in which this Information is included, you will adhere to standard fair use including avoidance of spamming, ripping, intellectual-property violations, privacy violations, and any other illegal activity.