



## Viewsonic VP Series VP2786-4K computer monitor 68.6 cm (27") 3840 x 2160 pixels 4K Ultra HD LCD Black

**Brand :** Viewsonic

**Product family:** VP Series

**Product code:** VP2786-4K

**Product name :** VP2786-4K

- Ultimate Precision
- Perfect From Screen to Print
- Maximum Palette Power
- Instant Color Adjustment
- Portable Darkroom


27", 3840 x 2160, 350 cd/m<sup>2</sup>, 16:9, 60 Hz, 100-240V, 67W, VESA 100 x 100 mm, black

Viewsonic VP Series VP2786-4K. Display diagonal: 68.6 cm (27"), Display resolution: 3840 x 2160 pixels, HD type: 4K Ultra HD, Display technology: LCD, Response time: 5 ms, Native aspect ratio: 16:9, Viewing angle, horizontal: 178°, Viewing angle, vertical: 178°. VESA mounting, Height adjustment. Product colour: Black



| Display                      |                       | Ergonomics                                |             |
|------------------------------|-----------------------|---|-------------|
| Display diagonal *           | 68.6 cm (27")         | Pivot                                     | ✓           |
| Display resolution *         | 3840 x 2160 pixels    | Pivot angle                               | 90 - 90°    |
| HD type *                    | 4K Ultra HD           | Tilt adjustment                           | ✓           |
| Native aspect ratio *        | 16:9                  | Tilt angle range                          | 3 - 21°     |
| Display technology *         | LCD                   | On Screen Display (OSD)                   | ✓           |
| Panel type *                 | IPS                   |   |             |
| Backlight type               | LED                   |   |             |
| Touchscreen *                | ✗                     |   |             |
| Display brightness (typical) | 350 cd/m <sup>2</sup> |   |             |
| Response time *              | 5 ms                  |   |             |
| Anti-glare screen            | ✓                     |   |             |
| Screen shape *               | Flat                  |   |             |
| Aspect ratio                 | 16:9                  |   |             |
| Contrast ratio (typical) *   | 1300:1                |   |             |
| Contrast ratio (dynamic)     | 20000000:1            |   |             |
| Maximum refresh rate *       | 60 Hz                 |   |             |
| Viewing angle, horizontal    | 178°                  |   |             |
| Viewing angle, vertical      | 178°                  |   |             |
| Display number of colours *  | 1.07 billion colours  |   |             |
| Digital horizontal frequency | 15 - 204 kHz          |   |             |
| Digital vertical frequency   | 24 - 120 Hz           |   |             |
| sRGB coverage (typical)      | 100%                  |   |             |
| NTSC coverage (typical)      | 108%                  |   |             |
| Adobe RGB coverage           | 100%                  |   |             |
| Performance                  |                       | Power                                     |             |
| Flicker-free technology      | ✓                     | Energy efficiency class (SDR) *           | F           |
| Low Blue Light technology    | ✓                     | Energy efficiency class (HDR) *           | F           |
|                              |                       | Energy consumption (SDR) per 1000 hours * | 26 kWh      |
|                              |                       | Energy consumption (HDR) per 1000 hours * | 25 kWh      |
|                              |                       | Power consumption (typical) *             | 67 W        |
|                              |                       | Power consumption (standby) *             | 0.5 W       |
|                              |                       | Power consumption (max)                   | 70 W        |
|                              |                       | AC input voltage                          | 100 - 240 V |
|                              |                       | Power supply type                         | Internal    |
|                              |                       | Energy efficiency scale                   | A to G      |
| Design                       |                       | Operational conditions                    |             |
| Market positioning *         | Graphics design       | Operating temperature (T-T)               | 0 - 40 °C   |
| Product colour *             | Black                 | Operating relative humidity (H-H)         | 20 - 90%    |
|                              |                       | Weight & dimensions                       |             |
|                              |                       | Width (with stand)                        | 613 mm      |
|                              |                       | Depth (with stand)                        | 232 mm      |
|                              |                       | Height (with stand)                       | 569.1 mm    |
|                              |                       | Weight (with stand)                       | 8.3 kg      |
|                              |                       | Width (without stand)                     | 613 mm      |
|                              |                       | Depth (without stand)                     | 55 mm       |
|                              |                       | Height (without stand)                    | 358 mm      |
|                              |                       | Weight (without stand)                    | 4.9 kg      |
|                              |                       | Packaging data                            |             |

| Ports & interfaces                           |              | Packaging data                   |                       |
|--|--------------|----------------------------------|-----------------------|
| Number of USB Type-B upstream ports quantity | 1            | Package width                    | 692 mm                |
| USB Type-A downstream ports quantity         | 4            | Package depth                    | 225 mm                |
| USB Type-C downstream ports quantity         | 1            | Package height                   | 505 mm                |
| USB Type-C DisplayPort Alternate Mode        | ✓            | Package weight                   | 13.2 kg               |
| HDMI *                                       | ✓            | Packaging content                |                       |
| HDMI ports quantity                          | 2            | Quick start guide                | ✓                     |
| HDMI version                                 | 2.0          | Sustainability                   |                       |
| DisplayPorts quantity                        | 1            | Sustainability certificates      | ENERGY STAR, ErP      |
| DisplayPort version                          | 1.4          | Other features                   |                       |
| Audio output                                 | ✓            | Weight                           | 8.3 kg                |
| Ergonomics                                   |              | Compliance certificates          | CE, REACH, RoHS, WEEE |
| VESA mounting *                              | ✓            | Logistics data                   |                       |
| Panel mounting interface                     | 100 x 100 mm | Pallet gross width               | 120 cm                |
| Cable lock slot *                            | ✓            | Pallet gross length              | 100 cm                |
| Cable lock slot type                         | Kensington   | Pallet gross height              | 2.15 m                |
| Height adjustment *                          | ✓            | Products per master (outer) case | 1 pc(s)               |
| Adjustable height (max)                      | 13 cm        | Harmonized System (HS) code      | 8528521000            |

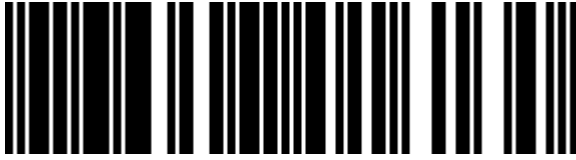

0766907016130



766907016130

### Catalog Object Cloud



Disclaimer. The information published here (the "Information") is based on sources that can be considered reliable, typically the manufacturer, but this Information is provided "AS IS" and without guarantee of correctness or completeness. The Information is only indicative and can be changed at any time without notification. No rights can be based on the Information. Suppliers or aggregators of this Information do not accept any liability with regard to the content of (web)pages and other documents, including its Information. The publisher of the Information can not be held liable for the content of 3rd party websites that are linking this Information or are linked to from this Information. You as the User of the Information are solely responsible for the choice and usage of this Information. You are not entitled to transfer, copy or otherwise multiply or distribute the Information. You are obliged to follow the directions of the copyright owner(s) with regard to the use of the Information. Exclusively Dutch law is applicable. With regard to price and stock data on the site, the publisher followed a number of starting points, which are not necessarily relevant for your private or business circumstances. Therefore, the price and stock data are only indicative and are subject to changes. You are personally responsible for the way you use and apply this information. As a user of the Information or sites or documents in which this Information is included, you will adhere to standard fair use including avoidance of spamming, ripping, intellectual-property violations, privacy violations, and any other illegal activity.