StarTech.com

# StarTech.com 4-Port PCI Express USB 3.0 Card

**Brand :** StarTech.com

**Product name :** 4-Port PCI Express USB 3.0 Card

**Product code:** PEXUSB3S42

StarTech.com 4 Port PCI Express USB 3.0 Card - 3 External and 1 Internal - Native OS Support in Windows 8 and 7 - Standard and Low-Profile
StarTech.com 4-Port PCI Express USB 3.0 Card. Host interface: PCIe, Output interface: USB 3.2 Gen 1 (3.1 Gen 1), Expansion card form factor: Full-height / Low-profile. Product colour: Black, Stainless steel, Maximum cable length: 3 m, Certification: CE, FCC. Chipset: 2 x Renesas / NEC - µPD720202, Data transfer rate (max): 5 Gbit/s. Windows operating systems supported: Windows 10 Education, Windows 10 Education x64, Windows 10 Enterprise, Windows 10 Enterprise x64,..., Server operating systems supported: Windows Server 2008 R2, Windows Server 2012. Width: 15 mm, Depth: 167 mm, Height: 120 mm

## Ports & interfaces

| | |
|---|---|
| Host interface * | PCIe |
| Output interface * | USB 3.2 Gen 1 (3.1 Gen 1) |
| Expansion card form factor | Full-height / Low-profile |
| Expansion card standard | PCI 2.0 |
| USB 3.2 Gen 1 (3.1 Gen 1) Type-A ports quantity | 4 |

## Design

| | |
|---|---|
| Internal * | ✔ |
| Product colour | Black, Stainless steel |
| Maximum cable length | 3 m |
| Hot-swap | ✔ |
| Certification | CE, FCC |

## Features

| | |
|---|---|
| Chipset | 2 x Renesas / NEC - µPD720202 |
| Data transfer rate (max) | 5 Gbit/s |
| UASP support | ✔ |

## Operational conditions

| | |
|---|---|
| Operating temperature (T-T) | 5 - 50 °C |
| Storage temperature (T-T) | -20 - 60 °C |
| Operating relative humidity (H-H) | 20 - 80% |

## System requirements

| | |
|---|---|
| Windows operating systems supported | Windows 10 Education, Windows 10 Education x64, Windows 10 Enterprise, Windows 10 Enterprise x64, Windows 10 Home, Windows 10 Home x64, Windows 10 Pro, Windows 10 Pro x64, Windows 7 Enterprise, Windows 7 Enterprise x64, Windows 7 Home Basic, Windows 7 Home Basic x64, Windows 7 Home Premium, Windows 7 Home Premium x64, Windows 7 Professional, Windows 7 Professional x64, Windows 7 Starter, Windows 7 Starter x64, Windows 7 Ultimate, Windows 7 Ultimate x64, Windows 8, Windows 8 Enterprise, Windows 8 Enterprise x64, Windows 8 Pro, Windows 8 Pro x64, Windows 8 x64, Windows 8.1, Windows 8.1 Enterprise, Windows 8.1 Enterprise x64, Windows 8.1 Pro, Windows 8.1 Pro x64, Windows 8.1 x64, Windows Vista Business, Windows Vista Business x64, Windows Vista Enterprise, Windows Vista Enterprise x64, Windows Vista Home Basic, Windows Vista Home Basic x64, Windows Vista Home Premium, Windows Vista Home Premium x64, Windows Vista Ultimate, Windows Vista Ultimate x64, Windows XP Home, Windows XP Home x64, Windows XP Professional, Windows XP Professional x64 |
| Linux operating systems supported | ✔ |
| Server operating systems supported | Windows Server 2008 R2, Windows Server 2012 |

| Technical details | |
|---|---|
| Compliance certificates | RoHS |
| **Weight & dimensions** | |
| Width | 15 mm |
| Depth | 167 mm |
| Height | 120 mm |
| Weight | 90 g |
| **Packaging data** | |
| Mounting brackets included | ✔ |
| Drivers included | ✔ |
| Manual | ✔ |
| Package width | 171 mm |
| Package depth | 144 mm |
| Package height | 30 mm |
| Package weight | 141 g |
| **Logistics data** | |
| Harmonized System (HS) code | 84733020 |
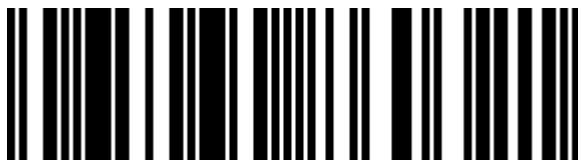
0065030860321

065030860321

0758399140967

758399140967

**Catalog Object Cloud**