

EnGenius ENH1350EXT Outdoor CB/AP Dual Band 11ac Wave2 AC1300 400+867Mbps 2T2R 4x5dBi RP-SMA Antenna 360° x 90° GbE PoE.af IP67

Brand : EnGenius


Product code: ENH1350EXT

Product name : ENH1350EXT Outdoor CB/AP Dual Band
11ac Wave2 AC1300 400+867Mbps 2T2R 4x5dBi RP-SMA
Antenna 360° x 90° GbE PoE.af IP67



EnGenius ENH1350EXT Outdoor CB/AP Dual Band 11ac Wave2 AC1300 400+867Mbps 2T2R 4x5dBi RP-SMA Antenna 360° x 90° GbE PoE.af IP67. 2.4 GHz, 5 GHz, Maximum data transfer rate: 1000 Mbit/s. Security algorithms: SNMP, SNMPv3. Ethernet LAN data rates: 10,100,1000 Mbit/s. Power over Ethernet (PoE). Product colour: White. Power consumption (max): 12.6 W

Features		Power	
2.4 GHz *	✓	Power over Ethernet (PoE) *	✓
5 GHz *	✓	Power consumption (max)	12.6 W
Maximum data transfer rate *	1000 Mbit/s	Design	
Ethernet LAN data rates	10,100,1000 Mbit/s	Placement *	Wall
Networking standards	IEEE 802.11a, IEEE 802.11ac, IEEE 802.11b, IEEE 802.11g, IEEE 802.11n	Product colour *	White
MIMO	✓	International Protection (IP) code	IP67
MIMO type	Multi User MIMO	Reset button	✓
Modulation	16-QAM, 64-QAM, 256-QAM, BPSK, CCK, QPSK	Internal	✗
Fit AP mode features	Wireless distribution system (WDS)	Antenna	
Wi-Fi roaming	✓	Antennas quantity	4
Fast roaming	✓	Antenna gain level (max)	5 dBi
VLAN support	✓	Antenna connector type	SMA
Virtual LAN features	Tagged VLAN, SSID-based VLAN assignment	Certificates	
Number of VLAN IDs	16	Certification	FCC, CE
Band steering	✓	Weight & dimensions	
Configuring Location Settings (CLI)	✓	Width	111.2 mm
Quality of Service (QoS) support	✓	Depth	173.6 mm
Security		Height	30.3 mm
Security algorithms *	SNMP, SNMPv3	Weight	295 g
MAC address filtering	✓	Packaging content	
Service Set Identifier (SSID) features	SSID broadcast on/off	AC adapter included	✓
Number of SSID supported	64	Cables included	AC
Auto Wireless Distribution System (WDS)	✓	Quick start guide	✓
Remote Authentication Dial-In User Service (RADIUS)	✓	Operational conditions	
Ports & interfaces		Operating relative humidity (H-H)	0 - 90%
Ethernet LAN (RJ-45) ports *	1	Operating temperature (T-T)	-20 - 60 °C
WAN connection	Ethernet (RJ-45)	Storage temperature (T-T)	-40 - 80 °C
DC-in jack	✓	Storage relative humidity (H-H)	0 - 90%
		Logistics data	
		Harmonized System (HS) code	85176990

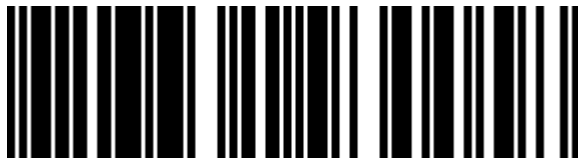

4713361930058

Catalog Object Cloud



Disclaimer. The information published here (the "Information") is based on sources that can be considered reliable, typically the manufacturer, but this Information is provided "AS IS" and without guarantee of correctness or completeness. The Information is only indicative and can be changed at any time without notification. No rights can be based on the Information. Suppliers or aggregators of this Information do not accept any liability with regard to the content of (web)pages and other documents, including its Information. The publisher of the Information can not be held liable for the content of 3rd party websites that are linking this Information or are linked to from this Information. You as the User of the Information are solely responsible for the choice and usage of this Information. You are not entitled to transfer, copy or otherwise multiply or distribute the Information. You are obliged to follow the directions of the copyright owner(s) with regard to the use of the Information. Exclusively Dutch law is applicable. With regard to price and stock data on the site, the publisher followed a number of starting points, which are not necessarily relevant for your private or business circumstances. Therefore, the price and stock data are only indicative and are subject to changes. You are personally responsible for the way you use and apply this information. As a user of the Information or sites or documents in which this Information is included, you will adhere to standard fair use including avoidance of spamming, ripping, intellectual-property violations, privacy violations, and any other illegal activity.