

Viewsonic PA503X data projector Standard throw projector 3600 ANSI lumens DLP XGA (1024x768) Grey, White

Brand : Viewsonic

Product code: PA503X

Product name : PA503X




1024 x 768, DLP, 3600 ANSI lum, 30-300", 190 W, 4:3, Mini USB B, RS-232, RCA, 3.5mm, HDMI 1.4, VGA, 2x RGB, 2 W RMS, 294x218x110 mm

Viewsonic PA503X. Projector brightness: 3600 ANSI lumens, Projection technology: DLP, Projector native resolution: XGA (1024x768). Light source type: Lamp, Service life of light source: 4500 h, Service life of light source (economic mode): 15000 h. Focus: Manual, Zoom type: Manual, Optical zoom: 1.1x. Analog signal format system: NTSC, PAL, PAL 60, SECAM, Supported graphics resolutions: 640 x 480 (VGA), 720 x 480, 720 x 576, 800 x 600 (SVGA), 1024 x 768 (XGA), 1280 x 1024 (SXGA),..., Supported video modes: 480i, 480p, 576i, 576p, 720p, 1080i, 1080p. Serial interface type: RS-232, HDMI connector type: Full-size

Projector		Storage	
Screen size compatibility *	762 - 7620 mm (30 - 300")	Card reader integrated *	✗
Projection distance	1.1 - 13 m	Features	
Contrast ratio (dynamic)	22000:1	Certification	FCC (ICES-003), cTUVus
Projector brightness *	3600 ANSI lumens	Multimedia	
Projection technology *	DLP	Built-in speaker(s) *	✓
Projector native resolution *	XGA (1024x768)	RMS rated power	2 W
Native aspect ratio *	4:3	Number of built-in speakers	1
Number of colours	1.073 billion colours	Design	
Horizontal scan range	15 - 102 kHz	Market positioning *	Business
Vertical scan range	23 - 120 Hz	Product type *	Standard throw projector
Keystone correction, vertical	-40 - 40°	Product colour *	Grey, White
Matrix size	1.4 cm (0.55")	Placement	Desktop
Matrix type	DMD	Cable lock slot	✓
Light source		Cable lock slot type	Kensington
Light source type *	Lamp	Display	
Service life of light source *	4500 h	Built-in display *	✗
Service life of light source (economic mode)	15000 h	Power	
Lamp power	190 W	Power source *	AC
Lamps quantity	1 lamp(s)	Power consumption (typical) *	260 W
Lens system		Power consumption (standby) *	0.5 W
Focus *	Manual	AC input voltage	100 - 240 V
Zoom capability	✓	AC input frequency	50 - 60 Hz
Zoom type	Manual	Operational conditions	
Optical zoom	1.1x	Operating temperature (T-T)	0 - 40 °C
Throw ratio	1.96 - 2.15:1	Operating relative humidity (H-H)	10 - 90%
Video		Operating altitude	0 - 1499 m
Analog signal format system *	NTSC, PAL, PAL 60, SECAM	Weight & dimensions	
3D Ready	✓	Width	294 mm
Supported graphics resolutions	640 x 480 (VGA), 720 x 480, 720 x 576, 800 x 600 (SVGA), 1024 x 768 (XGA), 1280 x 1024 (SXGA), 1280 x 720 (HD 720), 1280 x 800 (WXGA), 1360 x 768 (WXGA), 1366 x 768, 1400 x 1050 (SXGA+), 1440 x 900 (WXGA+), 1920 x 1200 (WUXGA)	Depth	218 mm
		Height	110 mm
		Weight *	2.22 kg
		Package width	365 mm
		Package depth	300 mm

Video		Weight & dimensions	
Supported video modes	480i, 480p, 576i, 576p, 720p, 1080i, 1080p	Package height	188 mm
		Package weight	3.24 kg
Ports & interfaces		Packaging content	
HDMI connector type	Full-size	Remote control included *	✓
HDMI version	1.4	Cables included	AC, VGA
Serial interface type *	RS-232	Quick start guide	✓
PC Audio in	✓	Logistics data	
PC Audio out	✓	Pallet gross length	74 cm
VGA (D-Sub) ports quantity *	3	Pallet gross width	90 cm
HDMI ports quantity *	1	Pallet gross height	2.21 m
Composite video in *	1	Products per master (outer) case	1 pc(s)
DVI port *	✗	Harmonized System (HS) code	8528620000
AC (power) in	✓	Other features	
Network		RS-232 ports	1
Ethernet LAN *	✗		
Wi-Fi *	✗		

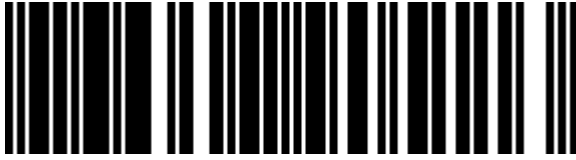

0766907905113



766907905113

Catalog Object Cloud



Disclaimer. The information published here (the "Information") is based on sources that can be considered reliable, typically the manufacturer, but this Information is provided "AS IS" and without guarantee of correctness or completeness. The Information is only indicative and can be changed at any time without notification. No rights can be based on the Information. Suppliers or aggregators of this Information do not accept any liability with regard to the content of (web)pages and other documents, including its Information. The publisher of the Information can not be held liable for the content of 3rd party websites that are linking this Information or are linked to from this Information. You as the User of the Information are solely responsible for the choice and usage of this Information. You are not entitled to transfer, copy or otherwise multiply or distribute the Information. You are obliged to follow the directions of the copyright owner(s) with regard to the use of the Information. Exclusively Dutch law is applicable. With regard to price and stock data on the site, the publisher followed a number of starting points, which are not necessarily relevant for your private or business circumstances. Therefore, the price and stock data are only indicative and are subject to changes. You are personally responsible for the way you use and apply this information. As a user of the Information or sites or documents in which this Information is included, you will adhere to standard fair use including avoidance of spamming, ripping, intellectual-property violations, privacy violations, and any other illegal activity.