



TP-Link AX1500 Wi-Fi 6 Travel Router

Brand : TP-Link

Product code: TL-WR1502X

Product name : AX1500 Wi-Fi 6 Travel Router


2.4 GHz (300 Mbps) + 5 GHz (1201 Mbps), Wi-Fi 6, 1x Gigabit WAN, 1x Gigabit LAN, 1x USB 2.0, 104 x 90 x 28 mm

TP-Link AX1500 Wi-Fi 6 Travel Router. Wi-Fi band: Dual-band (2.4 GHz / 5 GHz), Top Wi-Fi standard: Wi-Fi 6 (802.11ax), WLAN data transfer rate (max): 1500 Mbit/s. Ethernet LAN interface type: Gigabit Ethernet, Ethernet LAN data rates: 10,100,1000 Mbit/s. Security algorithms: WPA-Enterprise, WPA2-Enterprise, WPA2-PSK, WPA3-Personal, Firewall security: SPI Firewall. Product type: Portable router, Product colour: Black. Antenna design: Internal



WAN connection		Management features	
Ethernet WAN *	✓	WPS push button	✓
DSL WAN *	✗	Security	
3G/4G USB modem compatibility *	✓	Security algorithms	WPA-Enterprise, WPA2-Enterprise, WPA2-PSK, WPA3-Personal
Wireless LAN features		Firewall	✓
Wi-Fi band *	Dual-band (2.4 GHz / 5 GHz)	Firewall security	SPI Firewall
Top Wi-Fi standard *	Wi-Fi 6 (802.11ax)	Access Control List (ACL)	✓
WLAN data transfer rate (max) *	1500 Mbit/s	Protocols	
Wi-Fi standards	802.11a, 802.11b, 802.11g, Wi-Fi 4 (802.11n), Wi-Fi 5 (802.11ac), Wi-Fi 6 (802.11ax)	DHCP client	✓
WLAN data transfer rate (first band)	300 Mbit/s	DHCP server	✓
WLAN data transfer rate (second band)	1201 Mbit/s	Universal Plug and Play (UPnP)	✓
Network		Design	
Ethernet LAN *	✓	Product colour	Black
Ethernet LAN interface type *	Gigabit Ethernet	Indication light	✓
Ethernet LAN data rates	10,100,1000 Mbit/s	Product type *	Portable router
Port forwarding	✓	Antenna	
Port triggering	✓	Antenna design *	Internal
Dynamic DNS (DDNS)	✓	Power	
Number of guest networks (2.4 GHz)	1	Power source type *	USB
Number of guest networks (5 GHz)	1	Output voltage	12 V
Ports & interfaces		Output current	1.5 A
Ethernet LAN (RJ-45) ports *	2	Operational conditions	
USB port *	✓	Operating temperature (T-T)	0 - 40 °C
USB 2.0 ports quantity	1	Storage temperature (T-T)	-40 - 60 °C
		Operating relative humidity (H-H)	10 - 90%


Management features		Operational conditions	
Web-based management	✓	Storage relative humidity (H-H)	5 - 90%
Quality of Service (QoS) support	✓	Weight & dimensions	
		Width	104 mm
		Depth	90 mm
		Height	28 mm
		Packaging data	
		Package type	Box

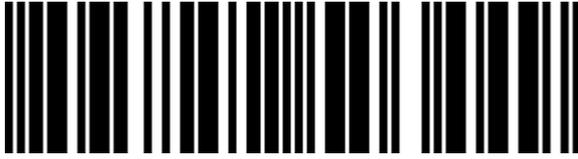

4895252503449



0840030710001



840030710001



1210002601542



8885021370798

Catalog Object Cloud



Disclaimer. The information published here (the "Information") is based on sources that can be considered reliable, typically the manufacturer, but this Information is provided "AS IS" and without guarantee of correctness or completeness. The Information is only indicative and can be changed at any time without notification. No rights can be based on the Information. Suppliers or aggregators of this Information do not accept any liability with regard to the content of (web)pages and other documents, including its Information. The publisher of the Information can not be held liable for the content of 3rd party websites that are linking this Information or are linked to from this Information. You as the User of the Information are solely responsible for the choice and usage of this Information. You are not entitled to transfer, copy or otherwise multiply or distribute the Information. You are obliged to follow the directions of the copyright owner(s) with regard to the use of the Information. Exclusively Dutch law is applicable. With regard to price and stock data on the site, the publisher followed a number of starting points, which are not necessarily relevant for your private or business circumstances. Therefore, the price and stock data are only indicative and are subject to changes. You are personally responsible for the way you use and apply this information. As a user of the Information or sites or documents in which this Information is included, you will adhere to standard fair use including avoidance of spamming, ripping, intellectual-property violations, privacy violations, and any other illegal activity.