

Viewsonic LS832WU data projector Ultra short throw projector 5000 ANSI lumens WUXGA (1920x1200) White



Brand : Viewsonic

Product code: LS832WU

Product name : LS832WU

- 0.25 ultra short throw for space-saving installation
- 2nd generation Laser Phosphor technology with up to a 30,000-hour lifespan
- 5,000 ANSI Lumens offering bright images in any environment
- Up to 170" ultra-large screen with lower cost-per-inch
- H/V keystone and 4 corner adjustment for enhanced installation flexibility
- Comprehensive LAN control providing efficient device management


5000 ANSI Lumens WUXGA Ultra Short Throw Laser Installation Projector, WUXGA, 1920x1200, 3000000:1, 28dB, 24- 85Hz, 328W

Viewsonic LS832WU. Projector brightness: 5000 ANSI lumens, Projector native resolution: WUXGA (1920x1200), Contrast ratio (typical): 3000000:1. Light source type: Laser, Service life of light source: 20000 h, Service life of light source (economic mode): 30000 h. Focal length range: 3.7 mm, Zoom type: Fixed, Offset: 133%. Serial interface type: RS-232, HDMI version: 2.2/1.4. Noise level: 34 dB, Noise level (economic mode): 28 dB

Projector		Features	
Screen size compatibility *	2032 - 4318 mm (80 - 170")	Noise level (economic mode)	28 dB
Projector brightness *	5000 ANSI lumens	Noise level *	34 dB
Projector native resolution *	WUXGA (1920x1200)	Multimedia	
Contrast ratio (typical) *	3000000:1	Built-in speaker(s) *	✓
Number of colours	1.07 billion colours	RMS rated power	10 W
Keystone correction, horizontal	10°	Number of built-in speakers	1
Keystone correction, vertical	10°	Design	
Horizontal synchronization (min)	15 kHz	Market positioning *	Portable
Horizontal synchronization (max)	91 kHz	Product type *	Ultra short throw projector
Light source		Product colour *	White
Light source type *	Laser	Display	
Service life of light source *	20000 h	Built-in display *	✗
Service life of light source (economic mode)	30000 h	Power	
Lens system		Power source *	AC
Focal length range	3.7 mm	Power consumption (typical) *	328 W
Zoom capability	✓	Power consumption (standby) *	0.5 W
Zoom type	Fixed	AC input voltage	100-240 V
Throw ratio	0.253	AC input frequency	50-60 Hz
Offset	133%	Operational conditions	
Ports & interfaces		Operating temperature (T-T)	5 - 40 °C
HDMI version	2.2/1.4	Weight & dimensions	
USB 2.0 ports quantity	1	Width	382 mm
USB 2.0 Type-A ports quantity	1	Depth	318 mm
USB 2.0 Type-B ports quantity	1	Height	132 mm
Audio (L/R) in *	1	Weight *	7 kg
Microphone in	✓	Package width	518 mm
Serial interface type *	RS-232	Package depth	420 mm
VGA (D-Sub) ports quantity *	1	Package height	313 mm
HDMI ports quantity *	2	Package weight	10 kg
Network		Packaging content	
Ethernet LAN *	✓	Remote control included *	✓
Ethernet LAN (RJ-45) ports	1	Logistics data	
		Pallet gross length	94 cm

Logistics data

Pallet gross width	114 cm
Pallet gross height	2.08 m
Products per master (outer) case	1 pc(s)
Harmonized System (HS) code	8528620000

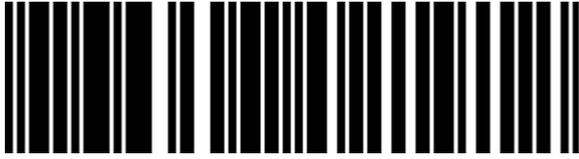

0766907021912



766907021912

Catalog Object Cloud



Disclaimer. The information published here (the "Information") is based on sources that can be considered reliable, typically the manufacturer, but this Information is provided "AS IS" and without guarantee of correctness or completeness. The Information is only indicative and can be changed at any time without notification. No rights can be based on the Information. Suppliers or aggregators of this Information do not accept any liability with regard to the content of (web)pages and other documents, including its Information. The publisher of the Information can not be held liable for the content of 3rd party websites that are linking this Information or are linked to from this Information. You as the User of the Information are solely responsible for the choice and usage of this Information. You are not entitled to transfer, copy or otherwise multiply or distribute the Information. You are obliged to follow the directions of the copyright owner(s) with regard to the use of the Information. Exclusively Dutch law is applicable. With regard to price and stock data on the site, the publisher followed a number of starting points, which are not necessarily relevant for your private or business circumstances. Therefore, the price and stock data are only indicative and are subject to changes. You are personally responsible for the way you use and apply this information. As a user of the Information or sites or documents in which this Information is included, you will adhere to standard fair use including avoidance of spamming, ripping, intellectual-property violations, privacy violations, and any other illegal activity.